


Specification

Nominal voltage	12 Volts	
Rated capacity (C ₂₀ Hour rate at 27°C)	200 Ampere Hour	
Dimensions (±2 mm)	Length	541 mm
	Width	232 mm
	Height	238 mm
Weight ± 1.0 Kgs (approx.)	61.0 Kgs	

Characteristics *

Capacity@ 80.6°F (27°C)	20 hour rate (10.0A) upto 10.5V	200.0 Ah
	10 hour rate (18.60A) upto 10.5V	186.0 Ah
	5 hour rate (34.30A) upto 10.2V	171.50 Ah
	1 hour rate (126.60A) upto 9.6V	126.60 Ah
	15 minute rate (327.90A) upto 9.6V	81.97 Ah
Internal resistance	Fully charged battery 80.6°F (27°C)	3.49mΩ
Capacity affected (Temperature at C ₂₀ hour rate)	104°F (40°C)	110%
	80.6°F (27°C)	100%
	32°F (0°C)	80%
	5°F (-15°C)	60%
Self discharge 80.6°F (27°C)	Capacity after 3 month storage	90%
	Capacity after 6 month storage	80%
Terminal Type	M8×25 mm Copper terminal	
Short circuit current (A)	3655	

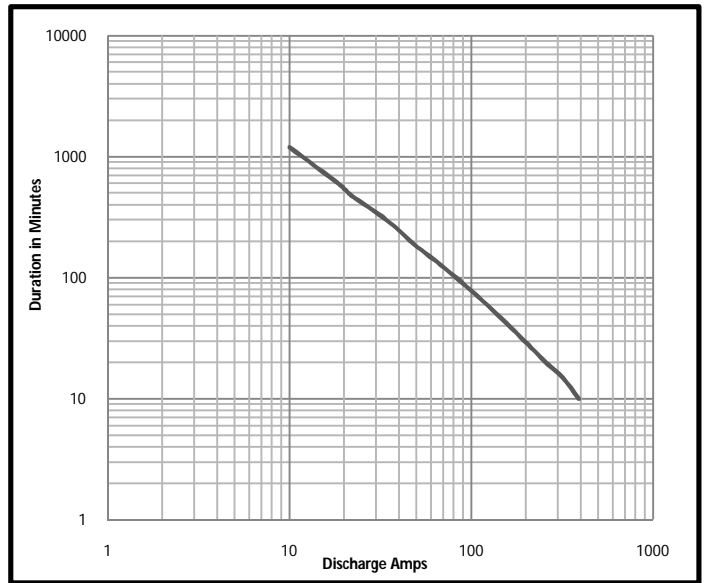


Constant power discharge rating watts per battery @ 27 °C *






ECV	DURATION											
	10 min	15 min	20 min	30 min	60 min	2 hrs	3 hrs	5 hrs	8 hrs	10 hrs	20 hrs	
1.60	4851	4183	3144	2675	1473	892	652	437	297	240	122	
1.65	4766	4088	3112	2592	1448	881	634	427	292	238	121	
1.70	4679	3992	3079	2508	1424	867	617	418	286	236	120	
1.75	4476	3803	3021	2466	1381	853	599	408	280	234	119	
1.80	4273	3614	2962	2422	1336	839	581	398	274	232	118	

Constant current discharge rating amperes @ 27 °C *

ECV	DURATION											
	10 min	15 min	20 min	30 min	60 min	2 hr	3 hr	5 hr	8 hr	10 hr	20 hr	
1.60	425.50	327.90	266.70	200.00	126.60	78.80	53.80	37.00	23.00	19.50	10.70	
1.65	416.90	325.30	265.00	199.00	125.80	75.60	52.20	35.70	22.50	19.20	10.50	
1.70	408.20	322.60	263.20	198.00	125.00	72.40	50.60	34.30	22.00	18.90	10.20	
1.75	400.00	317.50	256.40	196.10	122.00	71.40	50.50	34.20	21.90	18.60	10.00	
1.80	392.20	307.70	250.00	192.30	119.00	70.90	50.20	33.90	21.70	18.50	9.90	

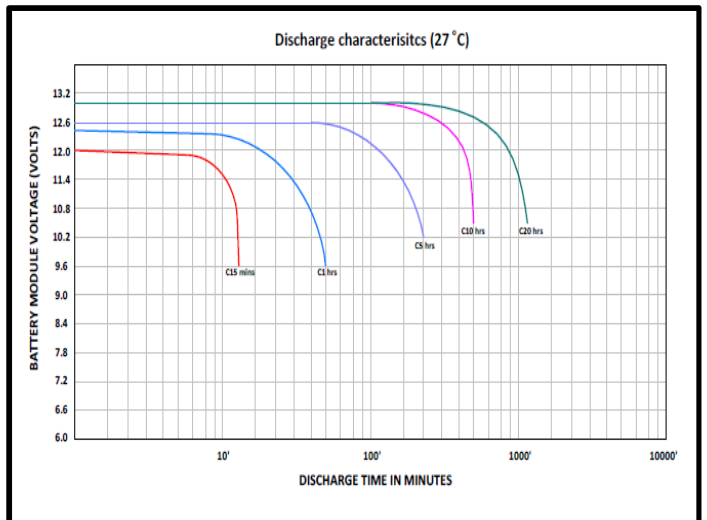

*Note: The above data are average values and can be obtained within five charge/discharge cycles
A tolerance of ±5% is applicable for the above constant power discharge values

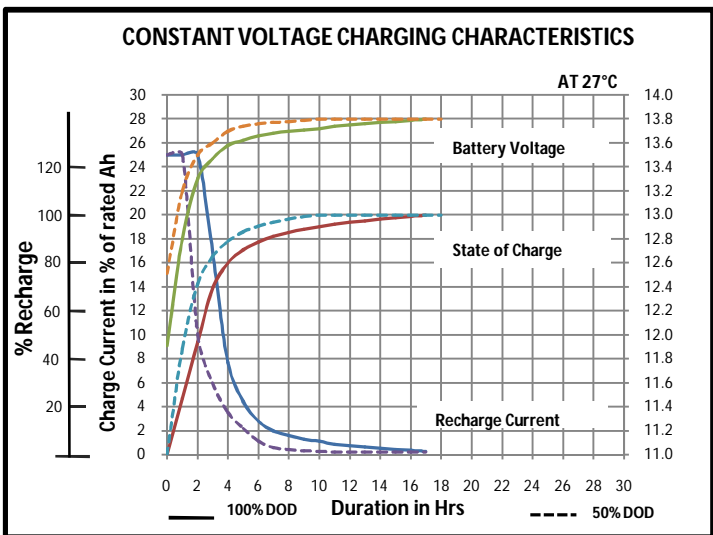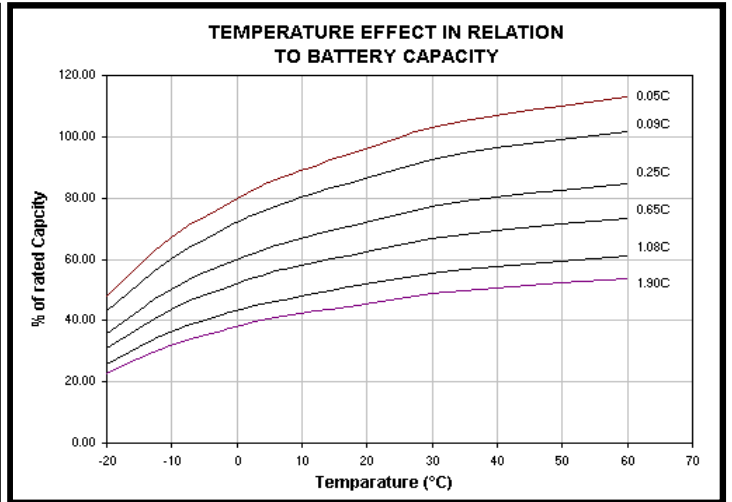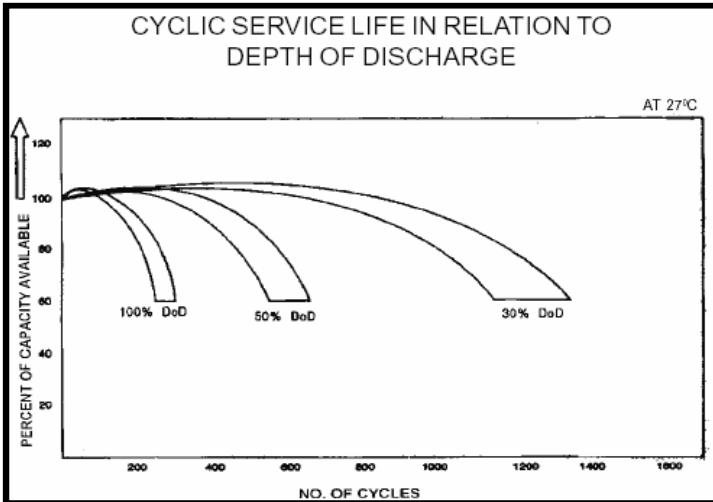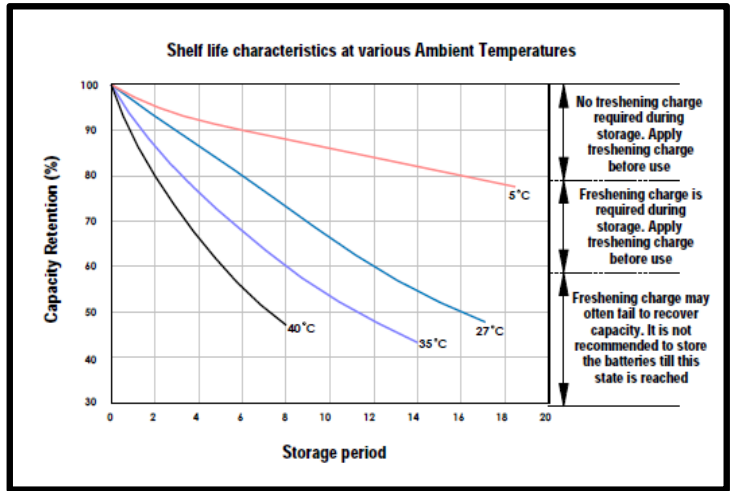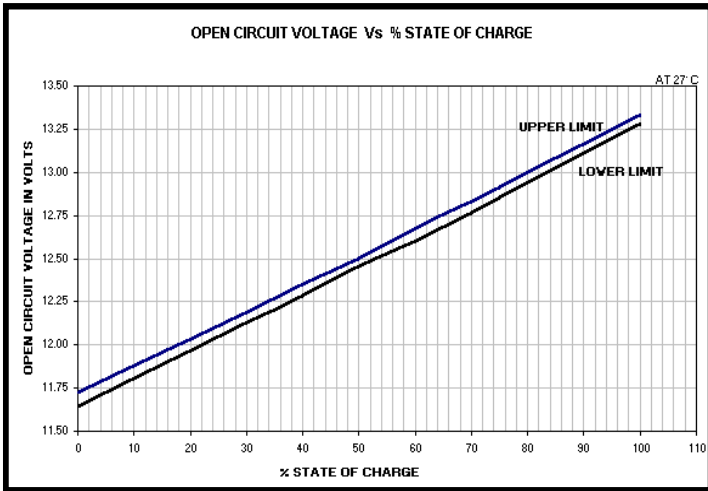

CHARGING METHODS:

Constant voltage charging at 27° C

Stand by use	: Charging voltage 13.5V/battery
Max. Charging current	: 25 % of rated Ah capacity
Cyclic use	: Charging voltage 13.8V/Battery
Max. Charging current	: 25 % of rated Ah capacity
Temperature compensation	: 18 mV/battery/°C

CAUTION:

- ⚡ Avoid short circuit
- 🚫 Don't charge in a sealed container

AMARARAJA BATTERIES LTD.

(An Amara Raja – Johnson controls company)

Regd. Office
 Manufacturing facility & Central Distribution center
 Karakambadi - 517520, Tirupathi – AP , INDIA
 ☎ +91-877-2265000 📠 +91-877-2285600
 ✉ amararaja@amararaja.co.in

Amara Raja Batteries Ltd.
 Terminal A
 1-18/1/AMR/NR, Nanakramguda
 Gachibowli, Hyderabad - 500032
 INDIA ☎ +91-40-23139000 📠 +91-40-23139001
 ✉ mktg@amararaja.co.in

Quality systems certified to

EN ISO 14001:2004
 ISO/TS 16949:2009